



Product Features

- Solid brass construction
- Includes installation box with plaster shield & flush insert
- Two function
- Cartridge included with trim kit to prevent loss or damage at jobsite

Code Compliance

This unit meets or exceeds the following:

- ASME A112.18.1
- CSA B125.1
- Listed by IAPMO
- Approved for use in Massachusetts

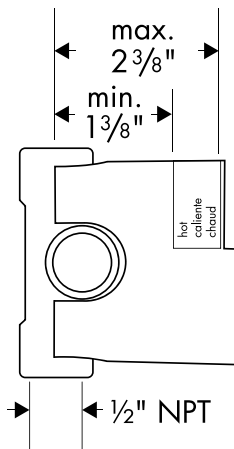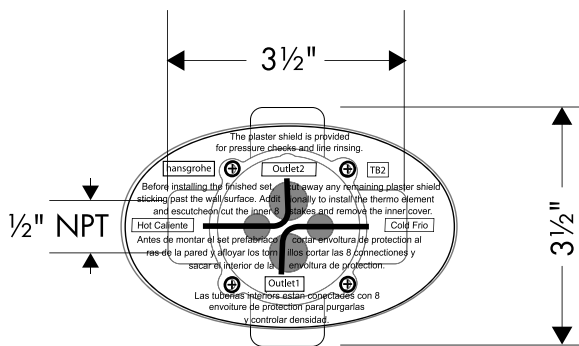

The measurements shown are for reference only.

Products and specifications shown are subject to change without notice.

Specification sheet revised 5/2008

Required Accessories

Requires ThermoBalance II trim kit – many styles available

Optional Accessories

Accessory service stops (pair)	06900003
Thinwall adapter	06343000
Extension kit (25 mm)	13592001

Installation Notes

- Both outlets must be plumbed – do not plug either outlet
- Do not use with diverter tub spout
- The plaster shield remains on the valve after installation